



**STYLE 23**

**The External Seal  
for Extreme Corrosion**

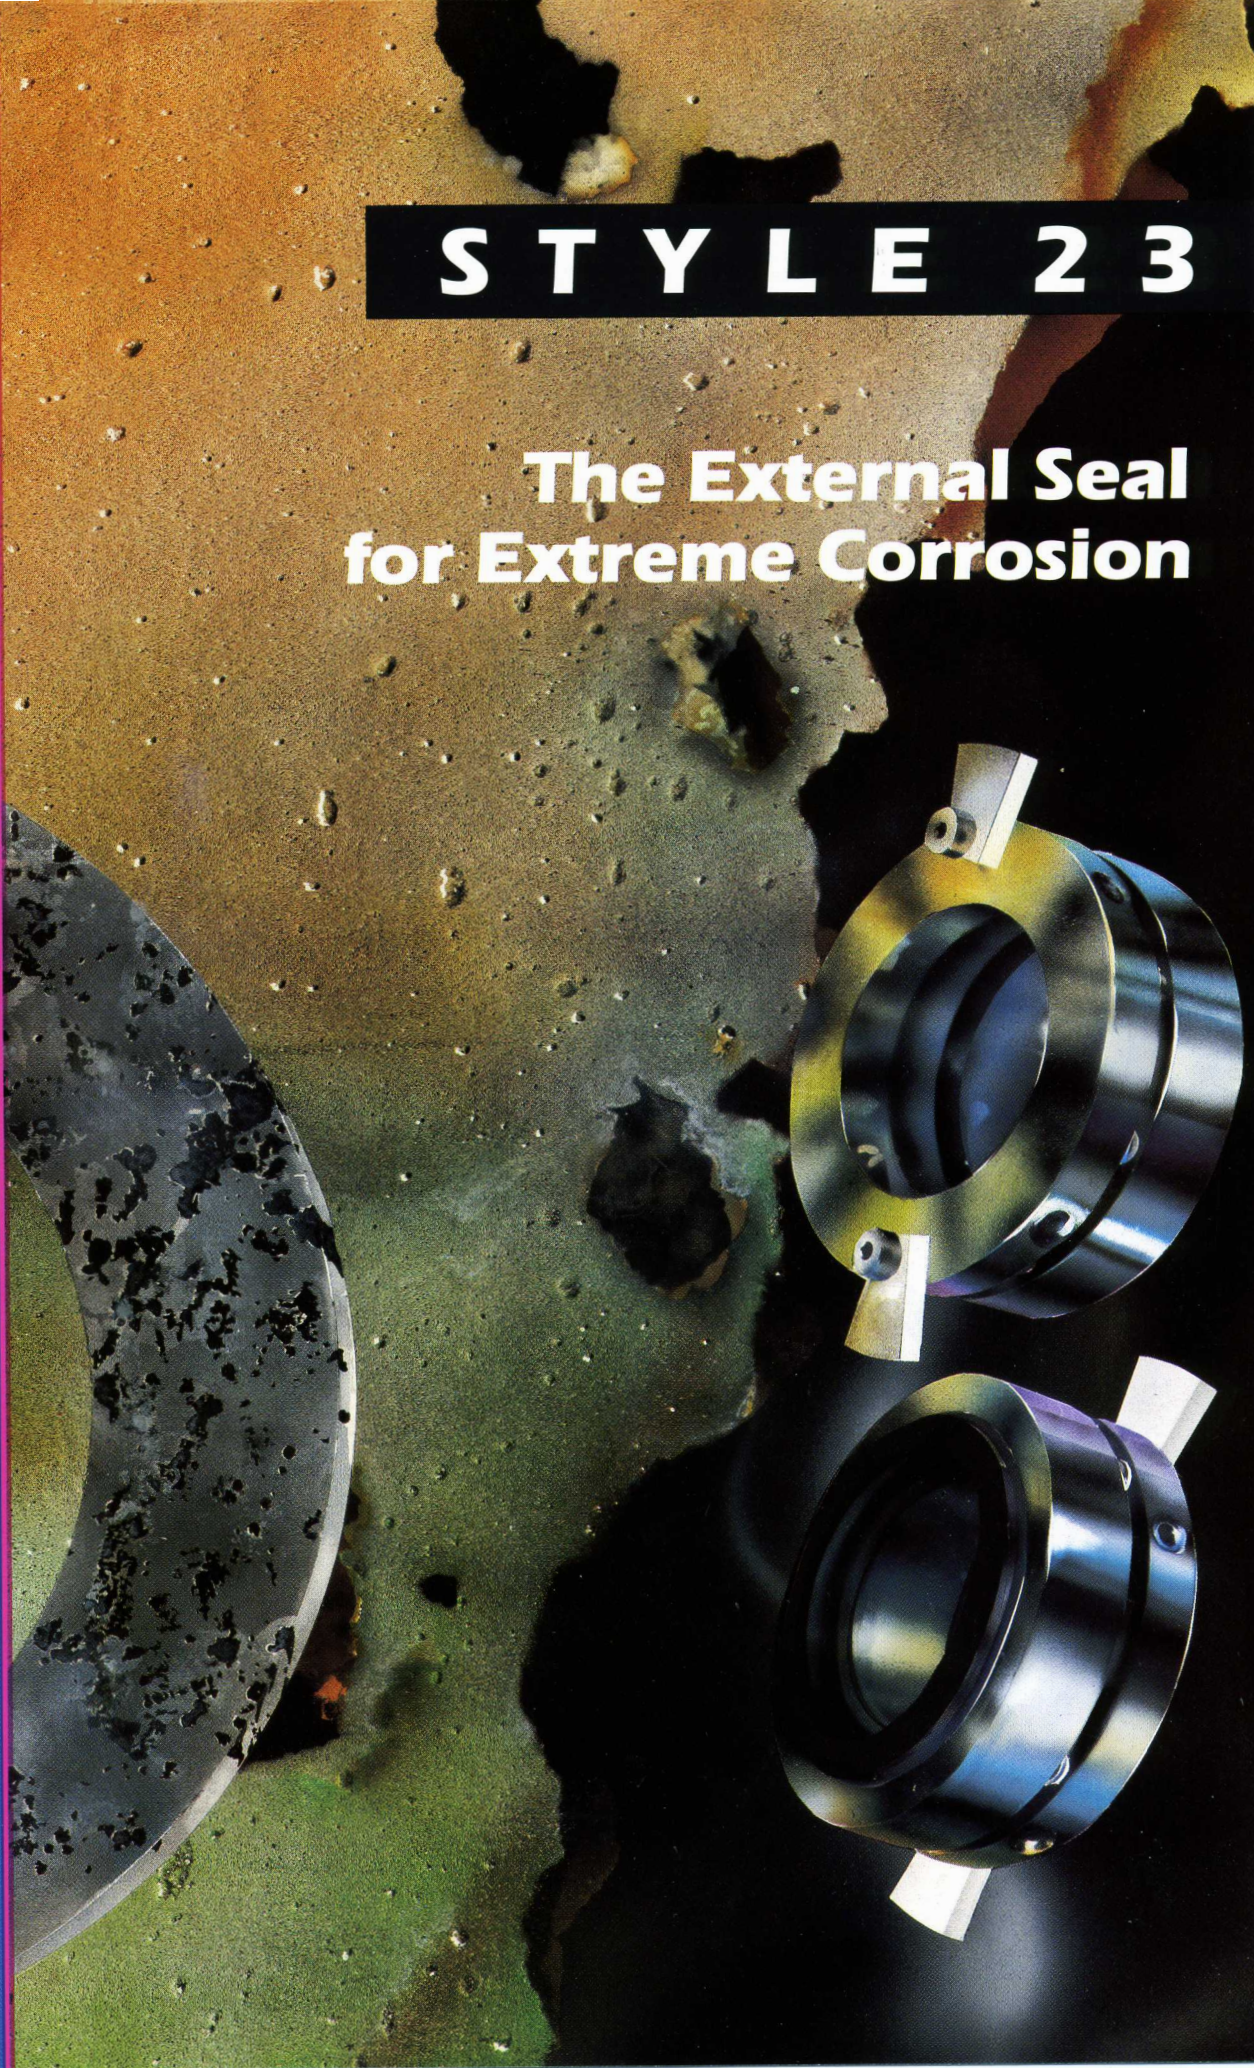

# When the pumpage is corrosive...

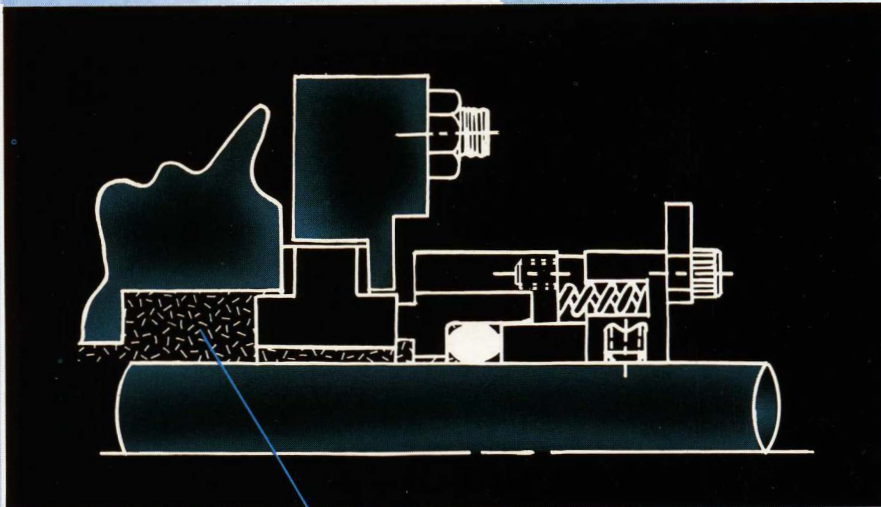

Product contacts only inert materials.

*Inside mounted seals, manufactured from metal, could disintegrate over time.*

*The Flex-A-Seal Style 23 solves the corrosion problem by only exposing compatible and/or inert material to the pumpage.*

## State-of-the-Art Engineering

- **Pre-assembled at factory**—No dimensions to take. Just slide on shaft, tighten collar, and remove setting clips.
- **Hydraulically balanced**—Factory engineered to handle internal pressure up to 150 PSI.
- **Readily accessible—Seal faces visible**—Seal is mounted outside the stuffing box and is **completely visible** and able to be modified without pulling pump down.

## Highest Quality Materials

- **High strength rotating face**—Carbon is shrouded in metal for extra compression strength, thus minimizing possibility of breakage.
- **Adaptable to teflon or plastic sleeves**—Optional split metal collar under set screws allows installation with no damage to softer materials.

## Best Value

- **Low cost**—No exotic metallurgy required so that the seal can be supplied at a reasonable cost.
- **Field repairable**—Pump can be put back in service with minimum spare parts and down time.
- **Off the shelf**—Sizes from 3/4" to 4 1/2" can be delivered as quickly as you require.
- **Low cost repair kits**—Repair a seal at a fraction of the original price.



Tel: 802.878.8307  
USA only: 800.426.3594  
[www.flexaseal.com](http://www.flexaseal.com)

INC.

STYLE 23